
FCT > D-SUB PRODUCTS

Standard, High-Density and Mixed Layout D-Subs D-Sub Hoods and Cable Assemblies





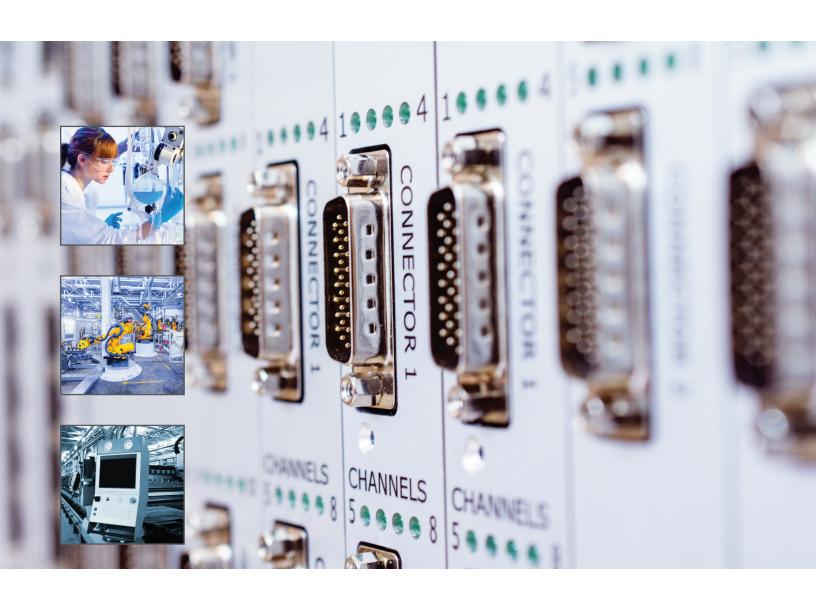

FCT D-Sub Connectors are a popular solution found in a broad range of applications and various industries. It is a time tested connector commonly used for signal transmission, communications, power distribution, control panels, and test equipment.

FCT D-Sub products machined contacts providing higher current, lower resistance, and greater durability compared to stamped contacts. They provide a secure and reliable, semi-permanent electrical path between two devices. Each series offers five different shell sizes. Additionally, available mating combinations include wire-to-wire, wire-to-board and board-to-board interconnects.

FCT D-Sub products are readily available in a wide variety of materials and plating combinations. Specialty D-Sub connectors include waterproof IP67, filtered, non-magnetic, and non-outgassing. If a new configuration is required Molex can conveniently provide a tailored solution.

To accompany the connectors there is also a full range of hoods. The hoods provide strain-relief, connector protection, and cable dressing- completing the cable assembly. Full turnkey cable assemblies are also available.



Applications



Power and Signal



Communications



Aircraft Cabins

Standard D-Sub

Circuit sizes: 9, 15, 25, 37, 50

Machined pin and socket contacts available as solder pot, crimp, straight or right-angled PCB termination



High-Density D-Sub

Circuit sizes: 15, 26, 44, 62, 78

Machined pin and socket contacts available as solder pot, crimp, straight or right-angled PCB termination



Mixed Layout D-Sub

Combining signal and special contacts in a single connector

Special contacts: power, coaxial, high-voltage, pneumatic

Many configuration layouts available



000000



Hoods, Metal and Plastic

Wide range of hoods in five shell sizes

Various designs and materials Simple assembly, no special tools



High Power Contacts

Size 8

Current Ratings: 10A, 20A, 30A and 40A

Gold plating options available Non-magnetic versions available

Cable assembly options: Crimp and solder versions

Board-level options: Straight or right-angle

Press-fit available

Coaxial Contacts

Size 8

Impedance: 50 Ohm and 75 Ohm available

Gold plating options available Non-magnetic versions available

Cable assembly options: Crimp and solder versions

Board-level options: Straight or right-angle

3 and 5-pin footprint options

High-Voltage Contacts

Size 8

Voltage: 3000V maximum
Gold plating options available

Cable assembly options: Crimp and solder versions

Board-level options: Straight

Pneumatic Contacts

Size 8

Suitable for compressed air line tubes

Pressure: 101.5 PSI maximum

Cable assembly options: Straight or right-angle

Standard Contacts

Size 20

Current Rating: 7.5A

Gold plating options available

Non-magnetic versions available

Cable assembly options: Crimp and solder versions

Board-level options: Straight or right-angle

High-Density Contacts

Size 22

Current Rating: 5A

Gold plating options available

Non-magnetic versions available

Cable assembly options: Crimp and solder versions available

Board-level options: Straight or right-angle















Waterproof D-Subs and Hoods

Standard, high-density and mixed layout D-Subs Waterproof hoods and protective caps

IP67 rated



Connectors, contacts, hoods Permeability $\mu r \leq 1.0025$ 100% permeability tested

Filtered D-Subs

Standard, high-density and mixed layout D-Subs

High-pass and low-pass filters

Dual Port D-Subs

Space saving, compact connector Standard, high-density and mixed layout D-Subs

Cable Assemblies

Data and signal cable assemblies
Power cable assemblies
Specialized hybrid cable assemblies
Fully shielded cable assemblies
Overmolded cable assemblies
IP67 rated cable assemblies













Applications



Test and Measurement



Medical Equipment



Security

Get customized insights at: **molex.com**

